



KR Audio Electronics Hi Vacuum Tube

KR 300B-Balloon

General Data



Filament specifications:	Voltage	5 V \pm 5 %
	Current	1.2 A
Amplification Factor		3.9


Maximum Ratings

DC Plate Voltage	550 V
DC Plate Current	120 mA
Plate Dissipation	50 W


Power Amplifier Class A1

DC Plate Voltage	450 V
DC Plate Current	100 mA
Grid Voltage	-90 V
Transconductance	6.2 mA/V
Plate Resistance	630 Ω

Dimensions

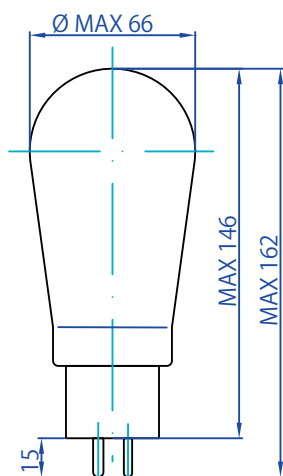

Connection of the Valve Base



View from below

F: Filament
A: Anode (Plate)
G: Grid

Plate characteristics KR 300B-Balloon

